



DNH^{AS}

**N-3770 Kragerø
NORWAY**
Phone: (47) 35 98 56 00
Fax: (47) 35 98 56 10
E-mail: dnh@dnh.no
Web-site: **www.dnh.no**

**DNH WW Ltd.
England**

Phone:.....(44) 1908 275 000
Fax:.....(44) 1908 275 100
E-mail:.....dnh@dnh.co.uk

**DNH GmbH
Germany**


Phone:.....(49) 040 6569 30-0
Fax:.....(49) 040 6569 30-30
E-mail:.....dnh@dnh.de

**DNH
Speakers Inc.
USA**

Phone:.....(1) 484 494 5790
Fax:.....(1) 484 494 5793
E-mail:.....dnh@dnhspeakers.com

ISO 9001 CERTIFIED


Marks for correct fitting of front at assembly

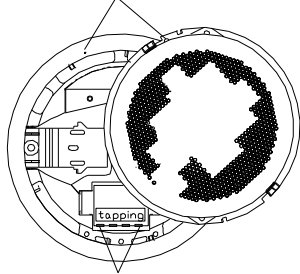

Transformer tapping selection according to label

Transformer is fitted here

HEIGHT: 82mm

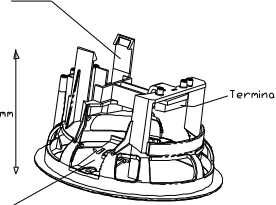

Locking ribs on each side. Secure loudspeaker to ceiling

Transformer:


Combined
70/100Volt line
White : Red 100 V
White : Green 70 V

Secondary nominal
tappings:

C : 6 6,0 W
C : 3 3,0 W
C : 1,5 1,5 W
C : 0,5 0,5 W

Maximum ceiling thickness: 15 mm
Recommended ceiling hole: ø 104- 107 mm

Sound pressure levels at different frequencies at 1W/1m sine wave.

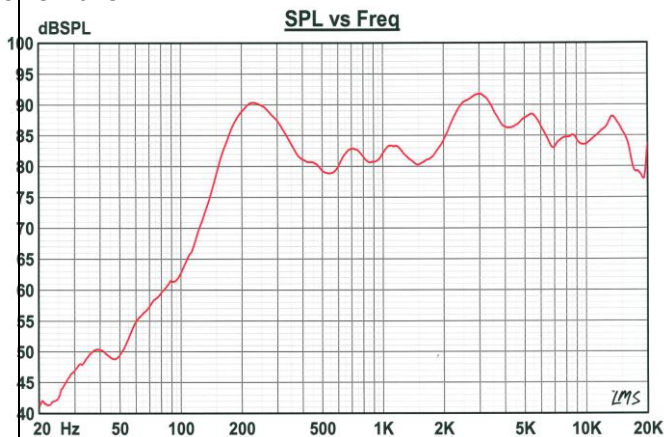

Material / Color ABS / RAL9010
Mounting Plastic clamps and 2 screws
Termination Plastic terminals
Weight 0,45 kg
IP-rating.....
Max / min amb temp 80°C / -20°C
Rated / max power 6 W / 8 W
SPL 1W/1m 88 dB
SPL rated power 95 dB
Effective freq range 140 – 20000 Hz
Dispersion (-6dB) 1kHz / 4kHz 150° / 50°
Directivity factor, Q
Options Impedance, color, label

Installation, Operation and Maintenance Procedures

- Select the transformer tapping chosen according to label.
- Fit the loudspeaker grille and loudspeaker in the outer ring. Ensure that the marks, (one on the grille and one at the outer ring), is in line before re- entered in the outer ring. Twist the loudspeaker grille clockwise into locked position.
- For optimum performance, always use the correct voltage / power and operate within the frequency limits as stated.
- Take care when loudspeaker is energized (100 V).
- This loudspeaker is supplied with a 2 year warranty against defective materials and workmanship.



DNH reserves the right to alter specifications without notice.

Rev. 03.12.2007