



DNH^{AS}

**N-3770 Kragerø
NORWAY**
 Phone: (47) 35 98 56 00
 Fax: (47) 35 98 56 10
 E-mail: dnh@dnh.no
 Web-site: www.dnh.no

**DNH WW Ltd.
England**
 Phone:.....(44) 1908 275 000
 Fax:.....(44) 1908 275 100
 E-mail:.....dnh@dnh.co.uk

**DNH GmbH
Germany**
 Phone:.....(49) 040 6569 30-0
 Fax:.....(49) 040 6569 30-30
 E-mail:.....dnh@dnh.de

**DNH
Speakers Inc.
USA**
 Phone:.....(1) 484 494 5790
 Fax:.....(1) 484 494 5793
 E-mail:.....dnh@dnhspeakers.com

PROB-635(T)


ISO 9001 CERTIFIED

Transformer:
100Volt line

Primary connection:
6 : 9 100 Volt line


Secondary nominal
tappings:

| | |
|-------|--------|
| 1 : 4 | 30,0 W |
| 1 : 3 | 15,0 W |
| 2 : 4 | 10,0 W |
| 1 : 2 | 7,5 W |
| 3 : 4 | 4,0 W |
| 2 : 3 | 2,0 W |
| 4 : 5 | 0,5 W |

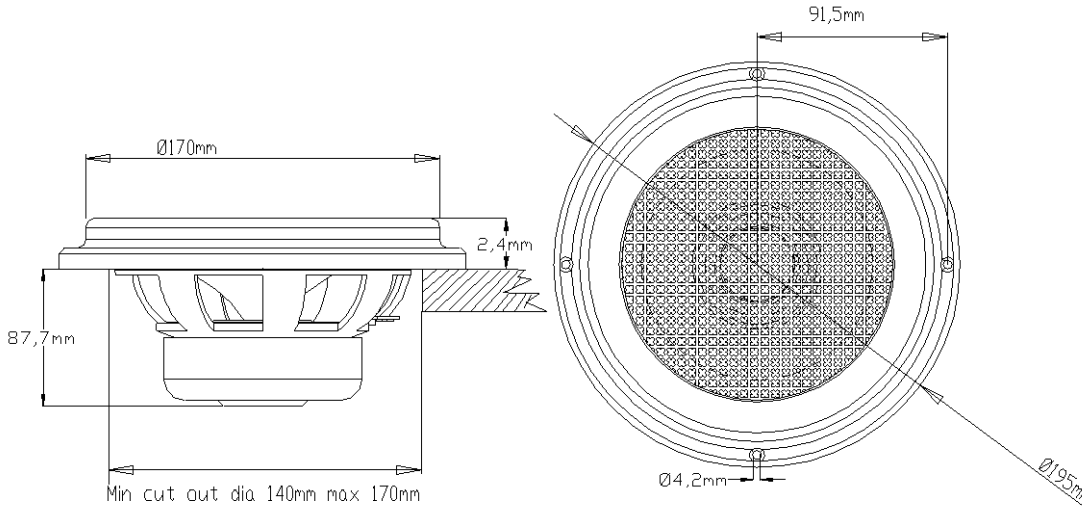

Included screws are made of brass or stainless steel depending on version.

SPL at different frequencies at 1W/1m sine wave

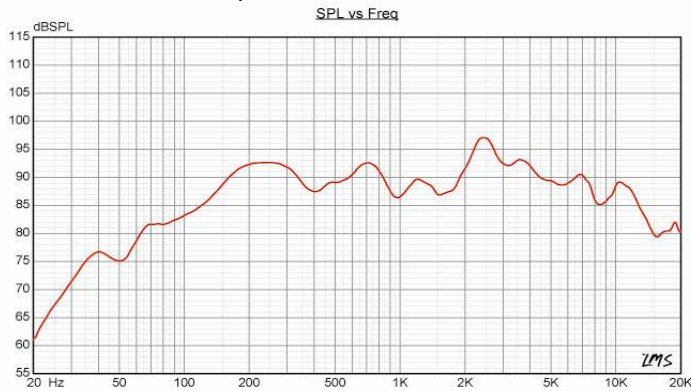

Material / Color Solid Brass or Stainless Steel
 Mounting Screws
 Termination Clips
 Weight without transformer 2,44 kg
 IP-rating
 Max. / min. amb. temp 100°C / -50°C
 Rated / max. power 30 W / 60 W
 SPL 1W/1m 90 dB
 SPL rated power 105 dB
 Effective freq. range 55 – 20000 Hz
 Dispersion (-6dB) 1kHz / 4kHz
 Directivity factor, Q (2kHz)
 Options Impedance, color, label

Installation, Operation and Maintenance Procedures

- Use clips or solder wire to the loudspeaker.
- Install loudspeaker grill by screws.
- For optimum performance, always use the correct voltage / power and operate within the frequency limits as stated.
- This loudspeaker is supplied with a 2 year warranty against defective workmanship.
- Separate screws and clips in box.