



DNH^{AS}

**N-3770 Kragerø
NORWAY**
 Phone: (47) 35 98 56 00
 Fax: (47) 35 98 56 10
 E-mail: dnh@dnh.no
 Web-site: **www.dnh.no**

**DNH WW Ltd.
England**

Phone:.....(44) 1908 275 000
 Fax:.....(44) 1908 275 100
 E-mail:.....dnh@dnh.co.uk

**DNH GmbH
Germany**

Phone:.....(49) 040 6569 30-0
 Fax:.....(49) 040 6569 30-30
 E-mail:.....dnh@dnh.de


**DNH
Speakers Inc.
USA**

Phone:.....(1) 484 494 5790
 Fax:.....(1) 484 494 5793
 E-mail:.....dnh@dnhspeakers.com

PS-6(T)


ISO 9001 CERTIFIED

Dimensions:

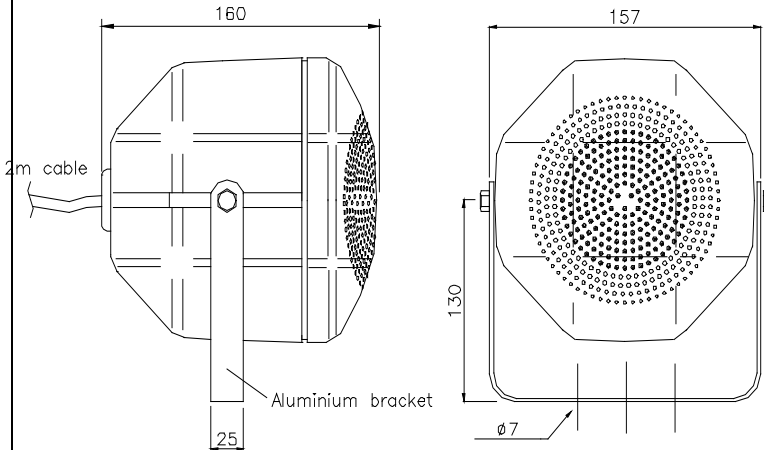

SPL at different frequencies at 1W/1m sine wave

Mounting:

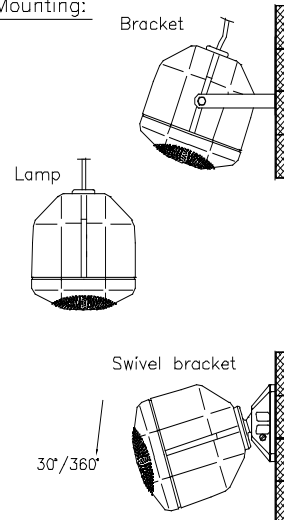


Transformer:
100 Volt line

Primary nominal
tappings:

1 : 2	6,0W
2 : 3	3,0W
3 : 4	1,5W
1 : 3	1,0W
2 : 4	0,5W
1 : 4	0,3W

1 = Red, 2 = Yellow,
3 = Green, 4 = Blue

SPL vs Freq

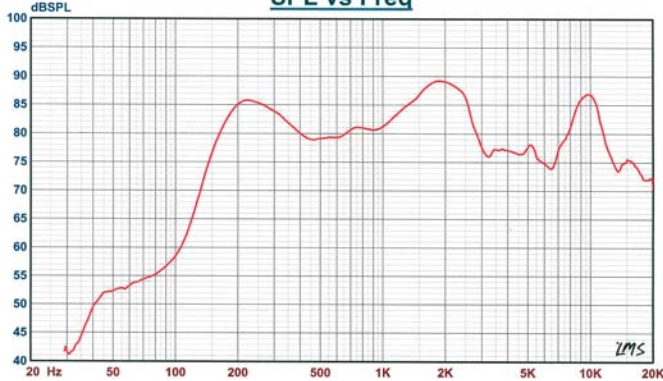

Material / Colour Polyamid / White (RAL 7035)
 Mounting. By cable as pendant / Bracket / Swivel bracket
 Termination Cable, 2m
 Weight (LT) 1,2 kg
 IP-rating 56
 Max. / min. amb. temp 120°C / -40°C
 Standard version 100 V transformer
 Rated / max. power 6 W / 15 W
 SPL 1W/1m 85 dB
 SPL rated power 93 dB
 Effective freq. range 125 – 18000 Hz
 Dispersion (-6dB) 1kHz / 4kHz 180° / 80°
 Options Impedance, colors, labels

Installation, Operation and Maintenance Procedures

- How to mount the loudspeaker:
 - Lamp-version (L): Ensure that the cable is fastened securely to the ceiling.
 - Bracket-version (LB): Screw the bracket to wall or ceiling with screws.
 - Swivel bracket version (LS): Read mounting instructions on carton box.
- To change the position of the loudspeaker:
 - Bracket version (LB): Adjust the bracket (by loosening / tightening the screws) as required.
 - Swivel bracket version (LS): Adjust the swivel base (by loosening / tightening the screws) as required.
- For optimum performance, always use the correct voltage / power and operate within the frequency limits as stated.
- Take care when loudspeaker is energized. (100V)
- This loudspeaker is supplied with a 2 year warranty against defective workmanship.