



# DNH<sup>AS</sup>

**N-3770 Kragerø  
NORWAY**  
Phone: ..... (47) 35 98 56 00  
Fax: ..... (47) 35 98 56 10  
E-mail: ..... dnh@dnh.no  
Web-site: ..... [www.dnh.no](http://www.dnh.no)



**DNH WW Ltd.  
England**  
Phone:.....(44) 1908 275 000  
Fax:.....(44) 1908 275 100  
E-mail:.....dnh@dnh.co.uk

**DNH GmbH  
Germany**  
Phone:.....(49) 040 6569 30-0  
Fax:.....(49) 040 6569 30-30  
E-mail:.....dnh@dnh.de

**DNH  
Speakers Inc.  
USA**  
Phone:.....(1) 484 494 5790  
Fax:.....(1) 484 494 5793  
E-mail:.....dnh@dnhspeakers.com

ISO 9001 CERTIFIED

## CAR-4 CR(T)

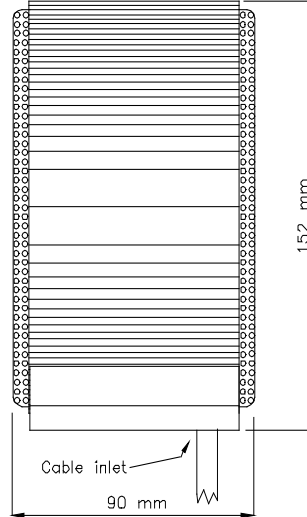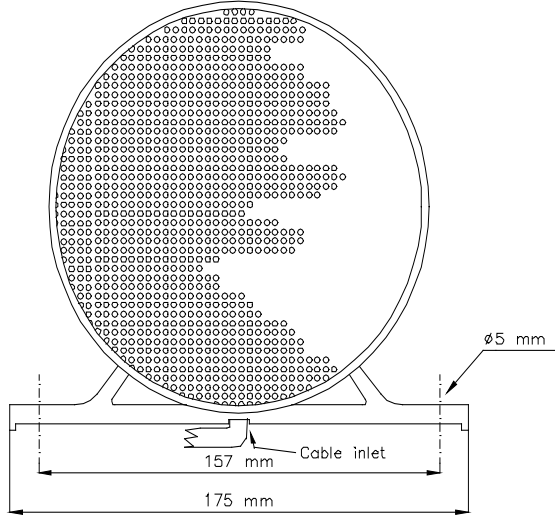


Transformer:  
100 Volt line

Primary nominal tapings:

Black : Red	4,0 W
Black : Yellow	2,0 W
Black : Green	1,0 W
Black : Blue	0,5 W

Sound pressure levels at different frequencies at 1W/1m sine wave.

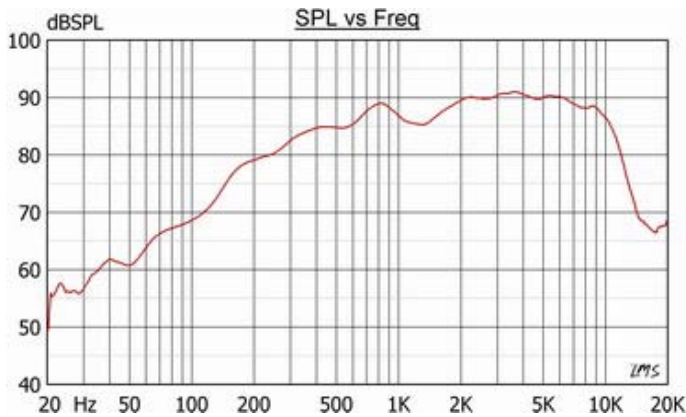

Material / Color ..... Aluminium / RAL9010 or anodized  
Mounting ..... Foot bracket  
Termination ..... Cable, 1 m  
Weight ..... 1,6 kg  
IP-rating .....  
Max. / min. amb. temp ..... 90°C / -40 °C  
Standard version ..... 100 V transformer  
Rated / max. power ..... 4 W / 6 W  
SPL 1W/1m ..... 85 dB  
SPL rated power ..... 91 dB  
Effective freq. range ..... 150 – 12000 Hz  
Dispersion (-6dB) 1kHz / 4kHz ..... 360° / 70°  
Directivity factor, Q .....  
Options ..... Impedance, color, label

### Installation, Operation and Maintenance Procedures

- For optimum performance, always use the correct voltage / power and operate within the frequency limits as stated.
- CAR-4CR is designed for clean room applications.
- This loudspeaker is supplied with a 2 year warranty against defective workmanship.